



# Agilent U2300A Series USB Modular Multifunction Data Acquisition Devices

## Data Sheet

### Features

- Up to 3 MSa/s sampling rate for a single channel
- Functions as a standalone or modular unit
- Easy to use: Plug-and-play and hot swappable with Hi-Speed USB 2.0
- Up to 384 channels when incorporated into U2781A Agilent modular product chassis
- Easy-to-use bundled software for quick setup and data logging to PC
- 12-bit or 16-bit analog-to-digital (A/D) resolution
- 24-bit programmable digital input/output
- Self-calibration capability
- Compatible with a wide range of Application Development Environments
- USB 2.0 and USBTMC-USB488 standards



### Introduction

The Agilent U2300A Series USB modular multifunction data-acquisition (DAQ) devices offer a high-performance PC data-acquisition solution. The U2300A Series DAQ devices consist of two families: the basic multifunction DAQ comes in four models while the high density multifunction DAQ is made up of

three models. The U2300A Series DAQ devices applications extend across industrial and education environments. Extending across industrial and education environments, the U2300A series DAQ with fast sampling rates is well suited for research and development, manufacturing as well as design validation designers.



### High sampling rate

The U2300A Series DAQ devices can generate sampling rates of up to 3 MSa/s for a single channel. When multiple channels are configured, the device can sample data up to 1 MSa/s. The fast sampling capability allows users to perform intermittent detection easily. This is ideal when dealing with high density analog input/output signals especially when juggling between different input ranges and sampling requirements.

### Flexible standalone or modular capability

The U2300A Series DAQ devices are uniquely designed with the flexibility to function as a standalone unit or as a part of a modular unit. When used together with the U2781A modular product chassis, the devices has the capability to support up to 384 channels.

### Flexible system and control options with polling and continuous mode

The U2300A Series DAQ devices have two modes, polling mode and continuous mode. Selecting continuous mode enables you to acquire data continuously once the trigger signal is received.

### Arbitrary waveform

Designed to support arbitrary waveforms, the U2300A Series allows you to generate arbitrary waveform via the Agilent Measurement Manager application software or SCPI commands.

### Burst mode

Equipped with the burst mode, the enhancement feature enables simultaneous mode for analog input acquisition. Now can you can perform sampling measurement up to the highest possible speed of the DAQ.

### Trigger sources

U2300A Series offers various trigger options from immediate trigger (none), analog/external digital trigger, System Synchronous Interface (SSI)/ Star trigger and Master/Slave trigger sources. These entire trigger options has the capability to configure trigger sources during A/D and digital-to-analog (D/A) operations. Selecting the slave trigger and SSI/Star trigger are recommended when the USB modules are used together with the Agilent U2781A USB modular product chassis.

### Predefined function generator

Aside from supplying DC voltage, the two analog output channels are capable of generating common and predefined waveforms such as sinusoidal wave, square wave, triangle wave, sawtooth wave and noise wave.

## Product outlook and dimensions


### Front view



### Rear view



### Top view

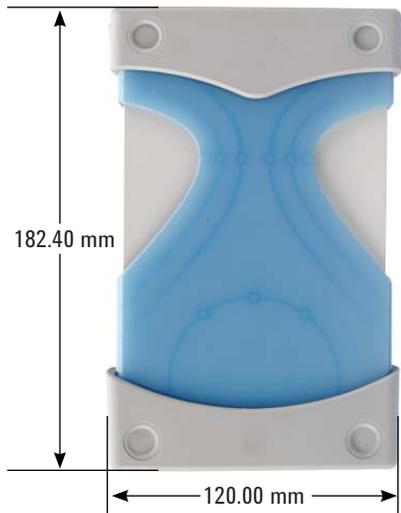

### Standard shipped accessories

- AC/DC Power adapter
- Power cord
- USB extension cable
- L-Mount kit (used with modular product chassis)
- Agilent USB Modular Products Quick Start Guide
- Agilent USB Modular Products Reference CD-ROM
- Agilent Automation-Ready CD-ROM (contains the Agilent IO Libraries Suite)
- Certificate of Calibration

### Optional accessories

- U2901A Terminal block and SCSI-II 68-pin connector with 1-meter cable
- U2902A Terminal block and SCSI-II 68-pin connector with 2-meter cable

## Product characteristics and general specifications

### Remote interface

- Hi-Speed USB 2.0
- USBTMC-USB488<sup>(1)</sup>

### Power requirement

- +12 VDC (TYPICAL)
- 2 A (MAX) input rated current

### Power consumption

+12 VDC, 550 mA maximum

### Operating environment

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 15% to 85% RH (non-condensing)
- Altitude up to 2000 meters
- Pollution Degree 2
- For indoor use only

### Storage compliance

-20 °C to 70 °C

### Safety compliance

#### Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)
- USA: UL61010-1: 2004
- Canada: CSA C22.2 No.61010-1:2004

### EMC compliance

- IEC/EN 61326-1 1998
- CISPR 11: 1990/EN55011:1991, Class A, Group 1
- Canada: ICES-001: 1998
- Australia/New Zealand: AS/NZS 2064.1

### Shock and vibration

Tested to IEC/EN 60068-2

### IO connector

68-pin female VHDCI Type

### Dimension (W × D × H)

#### Module dimension:

- 120.00 mm × 182.40 mm × 44.00 mm (with plastic casing)
- 105.00 mm × 174.54 mm × 25.00 mm (without plastic casing)

#### Terminal block dimension:

- 103.00 mm × 85.20 mm × 42.96 mm

### Weight

- 565 g (with plastic casing)
- 400 g (without plastic casing)

### Warranty

Three years for U2300A series DAQ devices  
Three months for standard shipped accessories

<sup>(1)</sup> Compatible with Microsoft Windows operating systems only. Requires a direct USB connection to the PC so the appropriate driver can be installed in the USB DAQ module.

# Electrical specifications

## Basic multifunction USB DAQ

Model number	U2351A	U2352A	U2353A	U2354A
<b>Analog input</b>				
Resolution	16 bits, no missing codes			
Number of channels	16 SE/8 DI (software selectable/channel)			
Maximum sampling rate <sup>[1]</sup>	250 kSa/s		500 kSa/s	
Scan list memory	Up to 100 selectable channel entries			
Programmable bipolar input range	$\pm 10\text{ V}$ , $\pm 5\text{ V}$ , $\pm 2.5\text{ V}$ , $\pm 1.25\text{ V}$			
Programmable unipolar input range	0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V			
Input coupling	DC			
Input impedance	1 G $\Omega$ / 100 pF			
Operational common mode voltage range	$\pm 7.5\text{ V}$ <sub>maximum</sub>			
Overvoltage protection	Power-on: Continuous $\pm 30\text{ V}$ , Power-off: Continuous $\pm 15\text{ V}$			
Trigger sources	External analog/digital trigger, SSI/Star trigger <sup>[2]</sup>			
Trigger modes	Pre-trigger, delay-trigger, post-trigger, and middle-trigger			
FIFO buffer size	Up to 8 MSa			
<b>Analog output</b>				
Resolution	16 bits	-	16 bits	-
Number of channels	2	-	2	-
Maximum update rate	1 MSa/s	-	1 MSa/s	-
Output ranges	0 to 10 V, $\pm 10\text{ V}$ , 0 to AO_EXT_REF, $\pm\text{AO\_EXT\_REF}$ <sup>[3]</sup>	-	0 to 10 V, $\pm 10\text{ V}$ , 0 to AO_EXT_REF, $\pm\text{AO\_EXT\_REF}$ <sup>[3]</sup>	-
Output coupling	DC	-	DC	-
Output impedance	0.1 $\Omega$ typical	-	0.1 $\Omega$ typical	-
Stability	Any passive load up to 1500 pF	-	Any passive load up to 1500 pF	-
Power-on state	0 V steady state	-	0 V steady state	-
Trigger sources	External analog/digital trigger, SSI/Star trigger <sup>[2]</sup>	-	External analog/digital trigger, SSI/Star trigger <sup>[2]</sup>	-
Trigger modes	Post-trigger and delay-trigger	-	Post-trigger and delay-trigger	-
FIFO buffer size	One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch	-	One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch	-
Function generation mode	Sine, square, triangle, sawtooth, and noise waveforms	-	Sine, square, triangle, sawtooth, and noise waveforms	-

## Basic multifunction USB DAQ (continued)

<b>Digital I/O</b>	
Number of channels	24-bit programmable input/output
Compatibility	TTL
Input voltage	$V_{IL} = 0.7 \text{ V max}$ , $I_{IL} = 10 \text{ } \mu\text{A max}$ $V_{IH} = 2.0 \text{ V min}$ , $I_{IH} = 10 \text{ } \mu\text{A max}$
Input voltage range	-0.5 V to +5.5 V
Output voltage	$V_{OL} = 0.45 \text{ V max}$ , $I_{OL} = 8 \text{ mA max}$ $V_{OH} = 2.4 \text{ V min}$ , $I_{OH} = 400 \text{ } \mu\text{A max}$
<b>General purpose digital counter</b>	
Maximum count	$(2^{31}-1)$ bits
Number of channels	Two independent up/down counter
Compatibility	TTL
Clock source	Internal or external
Base clock available	48 MHz
Maximum clock source frequency	12 MHz
Input frequency range <sup>[4]</sup>	0.1 Hz to 6 MHz at 50% duty cycle
Pulse width measurement range	0.167 $\mu\text{s}$ to 178.956 s
<b>Analog trigger</b>	
Trigger source	All analog input channels, External analog trigger (EXTA_TRIG)
Trigger level	$\pm$ Full scale for internal; $\pm 10 \text{ V}$ for external
Trigger conditions	Above high, below low, and window (software selectable)
Trigger level resolution	8 bits
Bandwidth	400 kHz
Input impedance for EXTA_TRIG	20 k $\Omega$
Coupling	DC
Overvoltage protection	Continuous for $\pm 35 \text{ V}_{\text{maximum}}$
<b>Digital trigger</b>	
Compatibility	TTL/CMOS
Response	Rising or falling edge
Pulse width	20 ns minimum
<b>Calibration<sup>[5]</sup></b>	
On board reference voltage	5 V
Temperature drift	$\pm 2 \text{ ppm}/^\circ\text{C}$
Stability	$\pm 6 \text{ ppm}/1000 \text{ hrs}$
<b>General</b>	
Remote interface	Hi-Speed USB 2.0
Device class	USBTMC-USB488
Programmable interface	Standard Commands for Programmable Instruments (SCPI) and IVI-COM

<sup>[1]</sup> When multiple channels are used, the sampling rate of each channel is the maximum sampling rate divided by the number of channels used.

<sup>[2]</sup> System Synchronous Interface (SSI) and Star trigger commands are used when modular devices are used in the product chassis.

<sup>[3]</sup> Maximum external reference voltage for analog output channels (AO\_EXT\_REF) is  $\pm 10 \text{ V}$ .

<sup>[4]</sup> Measurement frequency's resolution:  
= 12 MHz/n, n = 2, 3, 4, 5, ..., 120 M  
= 6 MHz, 4 MHz, 3 MHz, 2.4 MHz, 2.0 MHz, ..., 0.1 Hz (up to six decimal points)

<sup>[5]</sup> 20 minutes warm-up time is recommended.

## High density multifunction USB DAQ

Model number	U2355A	U2356A	U2331A
<b>Analog input</b>			
Resolution	16 bits, no missing codes		12 bits, no missing codes
Number of channels	64 SE/32 DI (software selectable/channel)		
Maximum sampling rate <sup>[1]</sup>	250 kSa/s	500 kSa/s	3 MSa/s (single channel) 1 MSa/s (multiple channels)
Scan list memory	Up to 100 selectable channel entries		
Programmable bipolar input range	±10 V, ±5 V, ±2.5 V, ±1.25 V		±10 V, ±5 V, ±2.5 V, ±1.25 V, ±1 V, ±0.5 V, ±0.25 V, ±0.2 V, ±0.05 V
Programmable unipolar input range	0 to 10 V, 0 to 5 V, 0 to 2.5 V, 0 to 1.25 V		0 to 10 V, 0 to 5 V, 0 to 4 V, 0 to 2.5 V, 0 to 2 V, 0 to 1 V, 0 to 0.5 V, 0 to 0.4 V, 0 to 0.1V
Input coupling	DC		
Input impedance	1 GΩ / 100 pF		
Operational common mode voltage range	±7.5 V maximum		
Overvoltage protection	Power-on: Continuous ±30 V, Power-off: Continuous ±15 V		
Trigger sources	External analog/digital trigger, SSI/Star trigger <sup>[2]</sup>		
Trigger modes	Pre-trigger, delay-trigger, post-trigger, and middle-trigger		
FIFO buffer size	Up to 8 MSa		
<b>Analog output</b>			
Resolution	12 bits		
Number of channels	2		
Maximum update rate	1 MSa/s		
Output ranges	0 to 10 V, ±10 V, 0 to AO_EXT_REF, ±AO_EXT_REF <sup>[3]</sup>		
Output coupling	DC		
Output impedance	0.1 Ω Typical		
Stability	Any passive load up to 1500 pF		
Power-on state	0 V steady state		
Trigger sources	External analog/digital trigger, SSI/Star trigger <sup>[2]</sup>		
Trigger modes	Post-trigger and delay-trigger		
FIFO buffer size	One channel: Maximum 8 MSa Two channels: Maximum 4 MSa/ch		
Function generation mode	Sine, square, triangle, sawtooth, and noise waveforms		
<b>Digital I/O</b>			
Number of bits	24-bit programmable input/output		
Compatibility	TTL		
Input voltage	$V_{IL} = 0.7 \text{ V max}$ , $I_{IL} = 10 \text{ } \mu\text{A max}$ $V_{IH} = 2.0 \text{ V min}$ , $I_{IH} = 10 \text{ } \mu\text{A max}$		
Input voltage range	-0.5 V to +5.5 V		
Output voltage	$V_{OL} = 0.45 \text{ V max}$ , $I_{OL} = 8 \text{ mA max}$ $V_{OH} = 2.4 \text{ V min}$ , $I_{OH} = 400 \text{ } \mu\text{A max}$		

## High density multifunction USB DAQ (continued)

<b>General purpose digital counter</b>	
Maximum count	$(2^{31} - 1)$ bits
Number of channels	Two independent up/down counter
Compatibility	TTL
Clock source	Internal or external
Base clock available	48 MHz
Maximum clock source frequency	12 MHz
Input frequency range <sup>[4]</sup>	0.1 Hz to 6 MHz at 50% duty cycle
Pulse width measurement range	0.167 $\mu$ s to 178.956 s
<b>Analog trigger</b>	
Trigger source	All analog input channels, External analog trigger (EXTA_TRIG)
Trigger level	$\pm$ Full scale for internal; $\pm$ 10 V for external
Trigger conditions	Above high, below low, and window (software selectable)
Trigger level resolution	8 bits
Bandwidth	400 kHz
Input impedance for EXTA_TRIG	20 k $\Omega$
Coupling	DC
Overvoltage protection	Continuous for $\pm$ 35 V <sub>maximum</sub>
<b>Digital trigger</b>	
Compatibility	TTL/CMOS
Response	Rising or falling edge
Pulse width	20 ns minimum
<b>Calibration<sup>[5]</sup></b>	
On board reference	5 V
Temperature drift	$\pm$ 2 ppm/ $^{\circ}$ C
Stability	$\pm$ 6 ppm/1000 hrs
<b>General</b>	
Remote interface	Hi-Speed USB 2.0
Device class	USBTMC-USB488
Programmable interface	Standard Commands for Programmable Instruments (SCPI) and IVI-COM

<sup>[1]</sup> When multiple channels are used in the U2355A or U2356A, the sampling rate of each channel is the maximum sampling rate divided by the number of channels used. For multiple channels used in the U2331A, the sampling rate of each channel = (1 MSa/s) / number of channels used.

<sup>[2]</sup> System Synchronous Interface (SSI) and Star trigger commands are used when modular devices are used in the product chassis.

<sup>[3]</sup> Maximum external reference voltage for analog output channels (AO\_EXT\_REF) is  $\pm$ 10 V.

<sup>[4]</sup> Measurement frequency's resolution:  
 = 12 MHz/n, n = 2, 3, 4, 5, ..., 120 M  
 = 6 MHz, 4 MHz, 3 MHz, 2.4 MHz, 2.0 MHz, ..., 0.1 Hz (up to six decimal points)

<sup>[5]</sup> 20 minutes warm-up time is recommended.

# Electrical measurement specifications

## Basic multifunction USB DAQ

Model number	U2351A, U2352A		U2353A, U2354A	
Analog input measurement <sup>[1]</sup>				
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset error	±1 mV	±5 mV	±1 mV	±5 mV
Gain error	±2 mV	±5 mV	±2 mV	±5 mV
–3 dB Small signal bandwidth <sup>[2]</sup>	760 kHz		1.5 MHz	
1% THD Large signal bandwidth <sup>[2]</sup>	300 kHz		300 kHz	
System noise	1 mVrms	2 mVrms	1 mVrms	2.5 mVrms
CMRR	62 dB		62 dB	
Spurious-Free Dynamic Range (SFDR) <sup>[3]</sup>	88 dB		82 dB	
Signal-to-Noise and Distortion Ratio (SINAD) <sup>[3]</sup>	80 dB		78 dB	
Total Harmonic Distortion (THD) <sup>[3]</sup>	–90 dB		–82 dB	
Signal-to-Noise Ratio (SNR) <sup>[3]</sup>	80 dB		78 dB	
Effective Number of Bits (ENOB) <sup>[3]</sup>	13		12.6	

Model number	U2351A, U2353A	
Analog output measurement <sup>[1]</sup>		
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset error	±1 mV	±4 mV
Gain error	±4mV	±5 mV
Slew rate	19 V/μs	
Rise time	0.9 μs	
Fall time	0.9 μs	
Settling time to 1% output error	4 μs	
Driving capability	5 mA	
Glitch energy	5 ns-V (Typical), 80 ns-V (Maximum)	

<sup>[1]</sup> Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

<sup>[2]</sup> Specifications are based on the following test condition:

Bandwidth test	Model number	Test conditions (DUT setting at ±10 V bipolar)
–3 dB Small signal bandwidth	U2351A	Sampling rate: 250 kSa/s
1% THD large signal bandwidth	U2352A	Input voltage: • –3 dB Small signal bandwidth • 1% THD Large signal bandwidth
	U2353A	• 10% FSR
	U2354A	• FSR –1 dB FS
	U2353A	Sampling rate: 500 kSa/s
	U2354A	Input voltage: • –3 dB Small signal bandwidth • 1% THD Large signal bandwidth
		• 10% FSR
		• FSR –1 dB FS

<sup>[3]</sup> Specifications are based on the following test conditions:

Dynamic range test	Model number	Test conditions (DUT setting at ±10 V bipolar)
SFDR, THD, SINAD, SNR, ENOB	U2351A	• Sampling rate: 250 kSa/s
	U2352A	• Fundamental frequency: 2.4109 kHz
		• Number of points: 8192
		• Fundamental input voltage: FSR –1 dB FS
	U2353A	• Sampling rate: 500 kSa/s
	U2354A	• Fundamental frequency: 4.974 kHz
		• Number of points: 16384
		• Fundamental input voltage: FSR –1 dB FS

## High density multifunction USB DAQ

Model number	U2355A		U2356A		U2331A	
Analog input measurement <sup>[1]</sup>						
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset error	±1 mV	±2 mV	±1 mV	±2 mV	±2 mV	±3 mV
Gain error	±2 mV	±3 mV	±2 mV	±6 mV	±6 mV	±7.5 mV
–3 dB small signal bandwidth <sup>[2]</sup>	760 kHz		1.3 MHz		1.2 MHz	
1% THD large signal bandwidth <sup>[2]</sup>	400 kHz		400 kHz		N/A	
System noise	1 mVrms	2 mVrms	1 mVrms	4 mVrms	3 mVrms	5 mVrms
CMRR	64 dB		61 dB		62 dB	
Spurious-Free Dynamic Range (SFDR) <sup>[3]</sup>	88 dB		86 dB		71 dB	
Signal-to-Noise and Distortion Ratio (SINAD) <sup>[3]</sup>	80 dB		78 dB		72 dB	
Total Harmonic Distortion (THD) <sup>[3]</sup>	–90 dB		–84 dB		–76 dB	
Signal-to-Noise Ratio (SNR) <sup>[3]</sup>	80 dB		78 dB		72 dB	
Effective Number of Bits (ENOB) <sup>[3]</sup>	13		12.6		11.6	

<sup>[1]</sup> Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

<sup>[2]</sup> Specifications are based on the following test conditions.

Bandwidth test	Model number	Test conditions (DUT setting at ±10 V bipolar)
–3 dB Small signal bandwidth 1% THD Large signal bandwidth	U2355A	Sampling rate: 250 kSa/s Input voltage: • –3 dB Small signal bandwidth 10% FSR • 1% THD Large signal bandwidth FSR –1 dB FS
	U2356A	Sampling rate: 500 kSa/s Input voltage: • –3 dB Small signal bandwidth 10% FSR • 1% THD Large signal bandwidth FSR –1 dB FS
	U2331A	Sampling rate: 3 MSa/s Input voltage: • –3 dB Small signal bandwidth 10% FSR • 1% THD Large signal bandwidth FSR –1 dB FS

<sup>[3]</sup> Specifications are based on the following test conditions.

Dynamic range test	Model number	Test conditions (DUT setting at ±10 V bipolar)
–3 dB Small signal bandwidth 1% THD Large signal bandwidth	U2355A	• Sampling rate: 250 kSa/s • Fundamental frequency: 2.4109 kHz • Number of points: 8192 • Fundamental input voltage: FSR –1 dB FS
	U2356A	• Sampling rate: 500 kSa/s • Fundamental frequency: 4.974 kHz • Number of points: 16384 • Fundamental input voltage: FSR –1 dB FS
	U2331A	• Sampling rate: 3 MSa/s • Fundamental frequency: 29.892 kHz • Number of points: 65536 • Fundamental input voltage: FSR –1 dB FS

High density multifunction USB DAQ (continued)

Model number	U2355A, U2356A		U2331A	
Analog output measurement <sup>(1)</sup>				
Function	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C	23 °C ± 5 °C	0 °C to 18 °C 28 °C to 45 °C
Offset error	±1 mV	±4 mV	±1.5 mV	±3 mV
Gain error	±4 mV	±5 mV	±4 mV	±5 mV
Slew rate	19 V/μs		19 V/μs	
Rise time	0.9 μs		0.9 μs	
Fall time	0.9 μs		0.9 μs	
Settling time to 1% output error	4 μs		4 μs	
Driving capability	5 mA		5 mA	
Glitch energy	5 ns-V (Typical), 80 ns-V (Maximum)		5 ns-V (Typical), 80 ns-V (Maximum)	

<sup>(1)</sup> Specifications are for 20 minutes of warm-up time, calibration temperature at 23 °C and input range of ±10 V.

# DC Characteristics

## Accuracy specifications

Model Number U2351A, U2352A, U2353A, U2354A			
Unipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Analog Input	
		Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>
10	1.5	2.0	0.04% + 1.5 mV
5	1.5	2.0	0.08% + 1.5 mV
2.5	1.0	1.0	0.08% + 1.0 mV
1.25	1.0	1.0	0.16% + 1.0 mV
Bipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>
10	1.0	2.0	0.02% + 1.0 mV
5	1.0	2.0	0.04% + 1.0 mV
2.5	1.0	1.5	0.06% + 1.0 mV
1.25	1.0	1.5	0.12% + 1.0 mV

Model Number U2355A, U2356A			
Unipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Analog Input	
		Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>
10	1.0	1.5	0.03% + 1.0 mV
5	1.0	1.5	0.06% + 1.0 mV
2.5	1.0	1.0	0.08% + 1.0 mV
1.25	1.0	1.0	0.16% + 1.0 mV
Bipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>
10	1.0	2.0	0.02% + 1.0 mV
5	1.0	2.0	0.04% + 1.0 mV
2.5	1.0	1.5	0.06% + 1.0 mV
1.25	1.0	1.5	0.12% + 1.0 mV

Model U2331A			
Unipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Analog Input	
		Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>
10	1.5	4.0	0.08% + 1.5 mV
5	1.5	2.0	0.08% + 1.5 mV
4	1.5	2.0	0.10% + 1.5 mV
2.5	1.0	1.5	0.12% + 1.0 mV
2	1.0	1.0	0.10% + 1.0 mV
1	1.0	1.0	0.20% + 1.0 mV
0.5	1.0	1.0	0.41% + 1.0 mV
0.4	1.0	1.0	0.51% + 1.0 mV
0.1	1.0	1.0	2.04% + 1.0 mV

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.
- The measurement are calculated with 100 points averaging of data.

<sup>[1]</sup> Offset error is measured at midscale of full range.

<sup>[2]</sup> Accuracy = ± [% of |(Gain error / (Measured value – Midscale of FSR))| + Offset error]

## Accuracy specifications (Continued)

Model		U2331A		
Bipolar Range (V)	Offset Error (mV) <sup>[1]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[2]</sup>	
10	2.0	6.0	0.06% + 2.0 mV	
5	1.5	4.0	0.08% + 1.5 mV	
2.5	1.5	2.0	0.08% + 1.5 mV	
1.25	1.0	1.5	0.12% + 1.0 mV	
1	1.0	1.0	0.10% + 1.0 mV	
0.5	1.0	1.0	0.20% + 1.0 mV	
0.25	1.0	1.0	0.40% + 1.0 mV	
0.2	1.0	1.0	0.50% + 1.0 mV	
0.05	1.0	1.0	2.02% + 1.0 mV	

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.
- The measurement are calculated with 100 points averaging of data.

Model		U2351A, U2352A, U2353A, U2354A		
Analog output				
Unipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	1.0	2.0	0.02% + 1.0 mV	
Bipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	1.0	4.0	0.04% + 1.0 mV	

Model		U2355A, U2356A		
Unipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	1.0	2.0	0.02% + 1.0 mV	
Bipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	1.0	4.0	0.04% + 1.0 mV	

Model		U2331A		
Unipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	2.5	4.0	0.04% + 2.5 mV	
Bipolar Range (V)	Offset Error (mV) <sup>[3]</sup>	Gain Error (mV)	Accuracy (% of reading + offset error) <sup>[4]</sup>	
10	1.5	4.0	0.04% + 1.5 mV	

- The above specifications are typical for 23 °C.
- Specifications are for 20 minutes warm-up and self calibration.

<sup>[1]</sup> Offset error is measured at midscale of full range.

<sup>[2]</sup> Accuracy = ± [% of |(Gain error / (Measured value – Midscale of FSR))| + Offset error]

<sup>[3]</sup> Offset error is measured at 0 V.

<sup>[4]</sup> Accuracy = ± [% of |Gain error/Output value| + Offset voltage]

# Agilent Measurement Manager

The Agilent Measurement Manager (AMM) is an application data viewer software that comes with the standard purchase of the U2300A Series USB modular data acquisition. This software is designed to help you perform quick device configuration, data logging and data acquisition using the products.

Supported features found in the U2300A Series USB modular multi-function data acquisition devices:

- Averaging
- Command logger
- Self-calibration
- Option to save the current instrument configuration to a file
- Data logging and export feature to CSV, HTML and text only format files that can be printed
- Data viewer to load and review previously logged data
- Trigger settings between modules in the instrument chassis with Star trigger and Master/Slave trigger
- Synchronization display and data logging for modules in the instrument chassis

## Agilent Measurement Manager prerequisites

Prior to installing the Agilent Measurement Manager software, ensure that your PC meets the following minimum system requirements for installation and operations.

Requirement	Windows XP operating systems	Windows Vista operating systems	Windows 7 operating systems
Operating system	Windows XP Service Pack 3 (or later) <sup>1</sup>	Windows Vista (32-bit) Service Pack 1 and 2 <sup>2</sup>	Windows 7 (32-bit and 64-bit) <sup>3,4</sup>
Processor speed	600 MHz or higher required, 800 MHz recommended	1 GHz 32-bit (x86)	3 GHz 32-bit (x86)
Memory	256 MB minimum (1 GB or greater recommended)	1 GB minimum	2 GB minimum
Hard-disk space	1.5 GB minimum	1.5 GB minimum	1.5 GB minimum
Video	Super VGA (800 × 600) 256 colors or more	Support for DirectX® 9 graphics with 128 MB graphics memory recommended <sup>5</sup>	Support for DirectX 9 graphics with 128 MB graphics memory recommended <sup>5</sup>
CD-ROM drive or DVD-ROM drive <sup>6</sup>	Required	Required	Required
Browser	Microsoft Internet Explorer 5.01 or greater	Microsoft Internet Explorer 7 or greater	Microsoft Internet Explorer 7 or greater

[1] Supported Windows XP editions — Home or Professional

[2] Supported Windows Vista (32-bit) editions — Home Basic, Home Premium, Business, or Ultimate

[3] Supported Windows 7 (32-bit and 64-bit) editions — Home Basic, Home Premium, Professional, Enterprise, or Ultimate

[4] Agilent Measurement Manager for Windows 7 64-bit support is a 32-bit application running on a WOW64 (Windows-on-Windows 64-bit) emulator.

[5] Super VGA graphics is supported for Windows Vista and Windows 7.

[6] The type of media provided with the product determines whether a CD-ROM drive or DVD-ROM drive is required.

## Software requirements

Agilent IO Libraries Suite 15.1 and above<sup>1</sup>


Agilent T&M Toolkit Runtime version 2.1<sup>2</sup>

Agilent T&M Toolkit Redistributable Package 2.1 patch<sup>2</sup>

Microsoft .NET Framework version 2.0<sup>2</sup>

[1] Available on the Agilent Automation-Ready CD-ROM.

[2] Bundled with Agilent Measurement Manager software application installer.

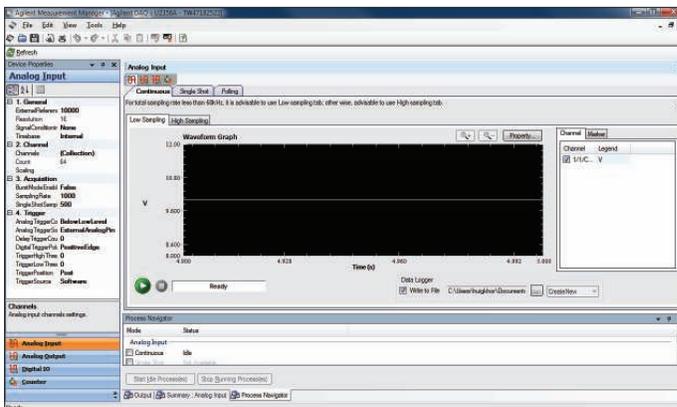

## Other products in the Agilent USB Modular Data Acquisition (DAQ) Family



### U2500A Series USB Modular Simultaneous Sampling Multifunction DAQ

#### Features:

- High analog input sampling rate coverage of up to 2 MSa/s for a each channel
- High speed USB 2.0
- Simultaneous acquisition of multiple data points
- Multifunction capabilities — analog input (AI), analog output (AO), digital input output (DIO), and counter

For more information: [www.agilent.com/find/U2500A](http://www.agilent.com/find/U2500A)



### U2600A Series USB Modular Isolated Digital I/O

#### Features:

- 64 opto-isolated lines that can meet demand up to 24 V
- High speed USB 2.0
- Isolation voltage of 1250 Vrms for protection from transient voltage spikes

For more information: [www.agilent.com/find/U2600A](http://www.agilent.com/find/U2600A)



### U2781A USB Modular Product Chassis

#### Features:

- Expansion of channels for each modular product
- Multiple instrument synchronization
- Internal and external 10 MHz reference clock
- High-speed USB 2.0
- SSI/Star trigger bus synchronization between external trigger source and modules

For more information: [www.agilent.com/find/U2781A](http://www.agilent.com/find/U2781A)

## Optional Accessories

The Agilent U2802A is a 31-channel thermocouple signal conditioning module with a built-in thermistor for cold junction compensation. The U2802A is designed to convert low input voltage signals (less than  $\pm 100$  mV) from a thermocouple into an output voltage range suitable for data acquisition devices ( $\pm 10$  V). The U2802A device is to be used in conjunction with the Agilent U2355A or U2356A model DAQ device to enable temperature measurements using thermocouples. It works as a standalone device attached to a single DAQ device via two SCSI-II 68 conductor cables. Designed with the compatibility to complement eight standard thermocouple types, it caters to a wide range of applications in various industrial settings.

### Features to meet your demands

- 31 input channels that can be independently configured to either differential thermocouple input mode, single-ended voltage input mode, or differential voltage input mode using two input channels set to voltage input mode
- Supports the standard thermocouple types (J, K, R, S, T, N, E, and B) defined in the NIST ITS-90 Thermocouple Database
- Error detection for open thermocouple channels
- Built-in isothermal construction on terminal block for improved measurement accuracy
- Built-in thermistor for cold junction compensation
- Built-in zeroing function to compensate for overall system offset errors due to temperature drift and long term drift
- Up to  $\pm 10$  V input voltage range for higher voltage inputs
- Sampling rate of 500 kSa/s for overall module
- Sampling rate of 10 kSa/s total for all channels in thermocouple mode
- Quick and easy USB setup
- Robust, cost-effective, and user friendly

### Applications

The U2802A thermocouple input device is designed for robust and demanding industrial applications. This product is suitable and ideal for thermocouple measurement applications such as;

- Product thermal analysis and characterization
- Environmental chamber profiling
- Process monitoring in consumer electronics markets
- Material properties testing in education environments
- Study of electronic temperature properties
- Appliances testing



### Thermocouple input mode

In thermocouple input mode, the U2802A can acquire up to  $\pm 100$  mV input signals. Each channel includes an instrumentation amplifier and a 4 Hz low-pass filter. The low-pass filter removes unwanted noise from the thermocouple wires to obtain accurate measurement data.

### Voltage input mode

Alternatively, you can select separate voltage input modes for each channel. The channel will be set to bypass the amplifier and filter, allowing up to  $\pm 10$ V input signals to be directly routed to the DAQ device analog input. The bandwidth in this mode is more than 500 kHz.

### Zero mode

In zero mode, the positive and negative inputs of the instrumentation amplifier are shorted together. The voltage measured in this mode corresponds to the offset voltage of the channel. You can subtract this offset voltage from subsequent thermocouple mode measurements to increase measurement accuracy. This mode is only applicable in thermocouple mode.

### Thermocouple compatibility

The U2802A is compatible with a wide range of standard thermocouple types defined in the NIST ITS-90 Thermocouple Database. This includes types J, K, R, S, T, N, E, and B.

### Open thermocouple detection

The U2802A includes open thermocouple detection circuitry to indicate the presence of an open thermocouple.

### Calibration EEPROM

The U2802A gain and offset calibration factors for each channel are stored in the EEPROM during factory calibration and can be retrieved prior to taking measurements. This on-board EEPROM also stores the module ID, serial number, and date of calibration for your reference. A section of the EEPROM is also allocated for you to save your calibration data.

### Restoring factory calibration

Using the AMM software, you can easily restore the U2802A calibration data from your settings to the original factory settings.



## Product outlook and dimensions


### Front view



### Rear view



### Top and side view

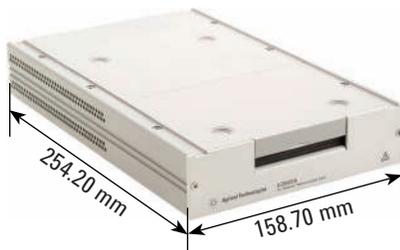

### Standard shipped accessories

- Power supply splitter
- Two 68-pin SCSI cables (1 m)
- One J-type thermocouple
- Agilent U2802A 31-Channel Thermocouple Input Device Quick Start Guide
- Agilent USB Modular Products Reference CD-ROM
- Agilent Automation-Ready CD-ROM (contains the Agilent IO Libraries Suite)
- Certificate of Calibration

## Product characteristics and general specifications

### Power consumption

+12 VDC, 480 mA maximum

### Operating environment

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 50% to 85% RH (non-condensing)
- Altitude up to 2000 meters

### Storage compliance

-40 °C to 70 °C

### Safety compliance

Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)

### EMC compliance

- IEC 61326-1:2002/EN 61326-1:1997+A2:2001+A3:2003
- CISPR 11: 1990/EN 55011:1990-Group 1 Class A
- Canada: ICES-001:2004
- Australia/New Zealand: AS/NZS CISPR 11:2004

### Shock and vibration

Tested to IEC/EN 60068-2

### IO connector

- 2 × 68-pin female SCSI connector
- 2 × 34 pin screw terminal block
- 1 × 24 pin screw terminal block

### Dimension (W × D × H)

158.70 mm × 254.20 mm × 40.50 mm

### Weight

1.036 kg

### Warranty

Three years for U2802A

Three months for standard shipped accessories

## Product specifications









General characteristics	
Number of channels	31 differential and 1 CJC
Input voltage range for voltage mode	$\pm 10$ V (signal + common mode)
Input voltage (thermocouple mode)	$\pm 100$ mV
Sampling rate for thermocouple mode	10 kSa/s total for all channels
Sampling rate for overall module	500 kSa/s
Thermocouple types	J, K, R, S, T, N, E, and B
Input specifications	
Accuracy (thermocouple mode)	
• Overall gain error	0.06% ( $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ )
• Overall offset error	15 $\mu\text{V}$ (without zeroing) ( $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ ) 6 $\mu\text{V}$ (with zeroing)
• Nonlinearity	< 0.005% of full scale range
System noise (rms)	
• Gain ( $\times 1$ )	100 $\mu\text{Vrms}$
• Gain ( $\times 100$ )	5 $\mu\text{Vrms}$
Common Mode Rejection Ratio (CMRR)	
• Voltage mode	> 60 dB
• Thermocouple mode	> 80 dB
Cold junction accuracy	$\pm 1.0\text{ }^{\circ}\text{C}$ typical ( $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ ) $\pm 1.5\text{ }^{\circ}\text{C}$ typical ( $0\text{ }^{\circ}\text{C}$ to $18\text{ }^{\circ}\text{C}$ , $28\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$ )
Input characteristics	
Bandwidth (voltage mode)	> 500 kHz
Bandwidth (thermocouple mode)	4.0 Hz
Overvoltage protection <sup>[1]</sup>	<b>TC Mode</b> <sup>[2]</sup> • Common mode: $\pm 17$ V (TC+ and TC– with respect to GND) • Differential mode: $\pm 7$ V (Differential voltage between TC+ and TC–) <b>Bypass mode</b> $\pm 20$ V (TC+ input with respect to GND) <b>Power-off Mode</b> $\pm 11$ V (TC+, TC– input with respect to GND)
Input impedance	> 1 G $\Omega$
Input bias current	$\pm 2.5$ nA max
Input offset current	$\pm 1.5$ nA max
Gain drift	60 ppm/ $^{\circ}\text{C}$ max
Offset drift	1 $\mu\text{V}/^{\circ}\text{C}$ max
Filter cutoff frequency (–3 dB) (thermocouple mode)	4.0 Hz
Filter type (thermocouple mode)	Low Pass RC Filter
Other features	
Recommended warm up time	30 minutes

<sup>[1]</sup> The overvoltage protection levels specified above indicate the maximum voltage each input pin can tolerate without resulting in any damages. However, prolonged exposure to these levels may affect device safety and reliability. Hence, it should be avoided where possible.

<sup>[2]</sup> On the channels configured for thermocouple mode, the TC+ and TC– pins can tolerate up to  $\pm 17$  V of differential voltage for a few minutes. However, exceeding a voltage range of  $\pm 100$  mV on these channels can cause additional current to be drawn from the device's power supply regulators, which may damage the device if multiple channels are overdriven for prolonged periods. This is the case when a voltage source is tied across the TC<sub>n</sub>+ and TC<sub>n</sub>– pin. Voltage sources greater than  $\pm 100$  mV should be tied to TC<sub>n</sub>+ and GND (floating source), or TC<sub>n</sub>+ and TC<sub>n+1</sub>+ (grounded source), and have the channels set for bypass mode.

# Thermocouples typical measurement accuracy

The U2802A measurement error with U2355A or U2356A at  $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$  is shown below.

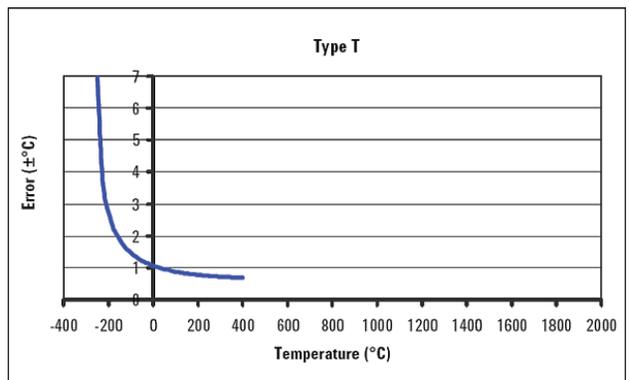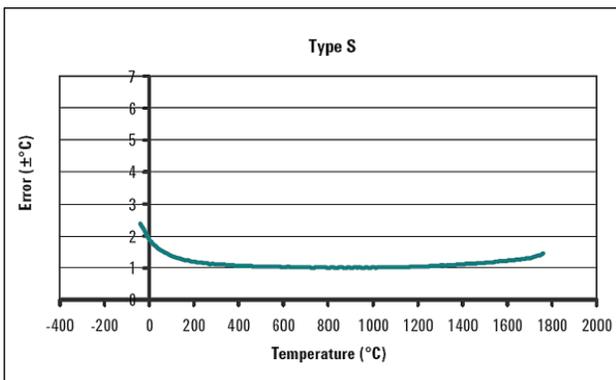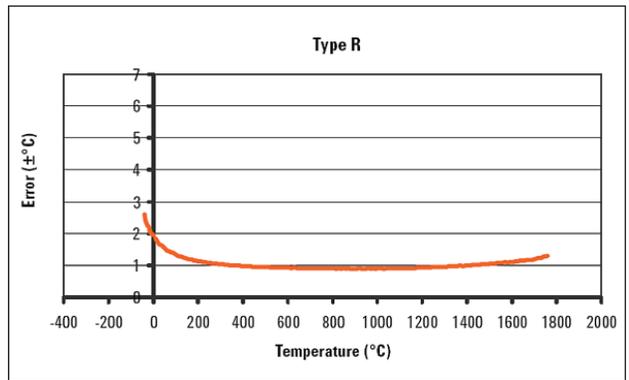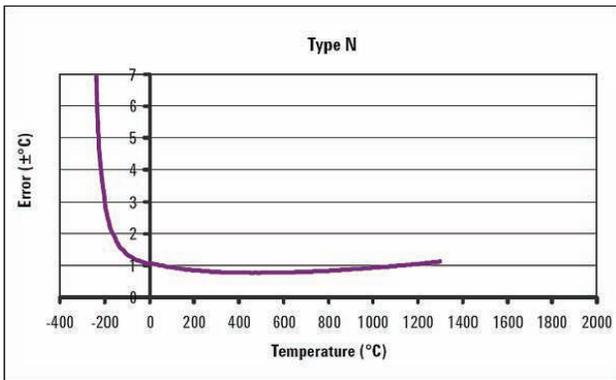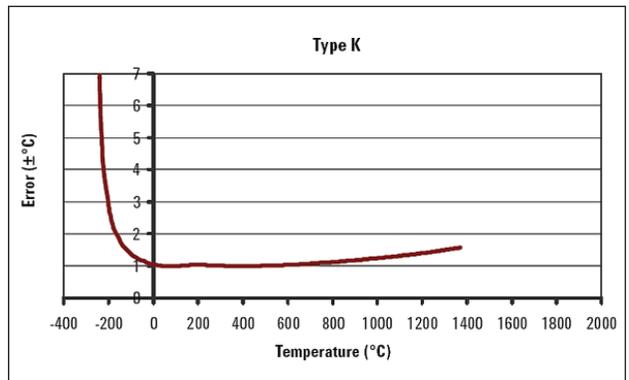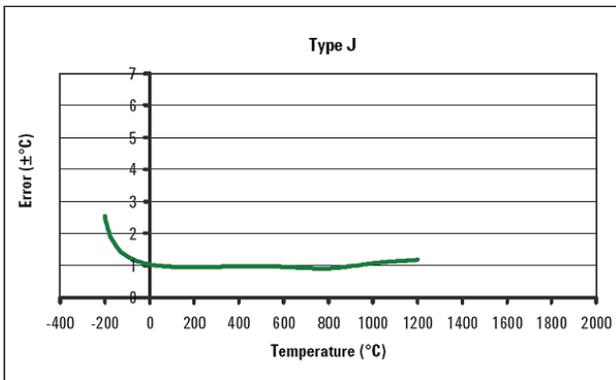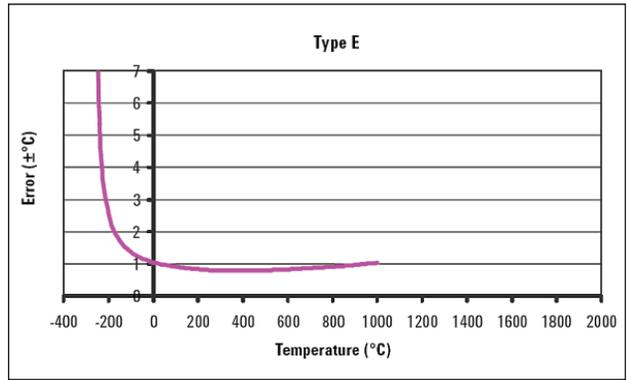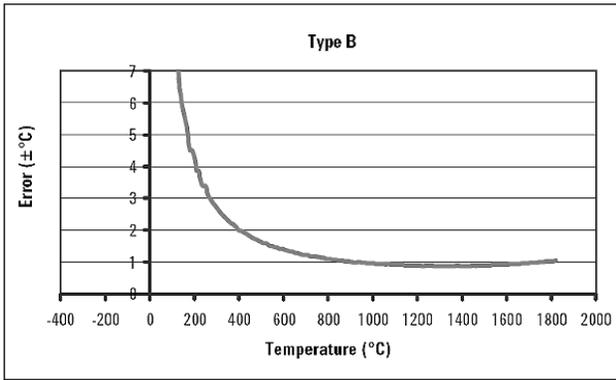

## System accuracy specifications

The U2802A system accuracy specifications are shown in Table 1, Table 2, and Table 3. These measurements are derived from the U2802A and DAQ input accuracy specifications without including the thermocouple error. Refer to “*Calculating System Accuracy*” section in the *Agilent U2802A 31-Channel Thermocouple Input Device User’s Guide* for calculation methodology.

Table 1. Measurement accuracy of the U2355A and U2356A at 23 °C ± 5 °C

Thermocouple measurement accuracy (U2355A, U2356A at 23 °C ± 5 °C)							
T/C type	ITS-90 Temperature range (°C)		Optimum measurement range (°C)		Without averaging (± °C)	50 points averaging (± °C)	500 points averaging (± °C)
	Low	High	Low	High			
B	0	1820	1100	1820	1.9	1.2	1.0
			400	1100	4.4	2.5	2.0
E	-270	1000	-150	1000	1.7	1.6	1.6
			-200	-150	2.4	2.3	2.3
J	-210	1200	-150	1200	1.6	1.5	1.5
			-210	-150	2.7	2.6	2.5
K	-270	1372	-100	1200	1.5	1.4	1.4
			-200	-100	2.7	2.6	2.6
N	-270	1300	-100	1300	1.5	1.3	1.3
			-200	-100	3.0	2.7	2.6
R	-50	1768	300	1760	2.0	1.4	1.3
			-50	300	5.0	3.1	2.6
S	-50	1768	400	1760	2.1	1.6	1.4
			-50	400	4.5	2.8	2.4
T	-270	400	-100	400	1.5	1.4	1.4
			-200	-100	2.7	2.5	2.5

Table 2. Measurement accuracy of the U2355A at 0 to 18 °C and 28 to 45 °C

Thermocouple measurement accuracy (U2355A at 0 to 18 °C and 28 to 45 °C)							
T/C type	ITS-90 Temperature range (°C)		Optimum measurement range (°C)		Without averaging (± °C)	50 points averaging (± °C)	500 points averaging (± °C)
	Low	High	Low	High			
B	0	1820	1100	1820	3.4	2.4	2.2
			400	1100	7.5	3.6	2.2
E	-270	1000	-150	1000	2.7	2.6	2.5
			-200	-150	3.8	3.6	3.6
J	-210	1200	-150	1200	2.5	2.4	2.4
			-210	-150	4.2	4.0	3.9
K	-270	1372	-100	1200	2.9	2.8	2.8
			-200	-100	4.3	4.0	3.9
N	-270	1300	-100	1300	2.6	2.5	2.5
			-200	-100	4.9	4.2	4.0
R	-50	1768	300	1760	3.8	3.1	3.0
			-50	300	8.5	4.6	3.3
S	-50	1768	400	1760	4.2	3.4	3.2
			-50	400	7.7	4.2	3.1
T	-270	400	-100	400	2.4	2.2	2.2
			-200	-100	4.3	4.3	3.9

Table 3. Measurement accuracy of the U2356A at 0 to 18 °C and 28 to 45 °C


Thermocouple measurement accuracy (U2356A @ 0 to 18 °C and 28 to 45 °C)							
T/C type	ITS-90 Temperature range (°C)		Optimum measurement range (°C)		Without averaging (± °C)	50 points averaging (± °C)	500 points averaging (± °C)
	Low	High	Low	High			
B	0	1820	1100	1820	6.1	3.1	2.4
			400	1100	14.4	6.3	2.7
E	-270	1000	-150	1000	3.0	2.6	2.6
			-200	-150	4.2	3.7	3.6
J	-210	1200	-150	1200	2.9	2.5	2.5
			-210	-150	4.9	4.1	4.0
K	-270	1372	-100	1200	3.3	2.9	2.9
			-200	-100	5.3	4.2	4.0
N	-270	1300	-100	1300	3.4	2.7	2.6
			-200	-100	6.8	4.6	4.1
R	-50	1768	300	1760	6.2	3.7	3.2
			-50	300	15.7	7.2	3.8
S	-50	1768	400	1760	6.4	4.0	3.4
			-50	400	14.2	6.6	3.4
T	-270	400	-100	400	3.0	2.4	2.2
			-200	-100	5.3	4.2	3.9

## U2901/U2902A -Terminal block and SCSI- II 68-pin connector with 1-meter/2-meter cable

The U2901A/U2902A is a terminal block and SCSI-II 68-pin connector with 1 meter cable or 2 meter cable that can be used conjunction with the U2300A Series and U2500A Series.

### Terminal block overview

#### Front view

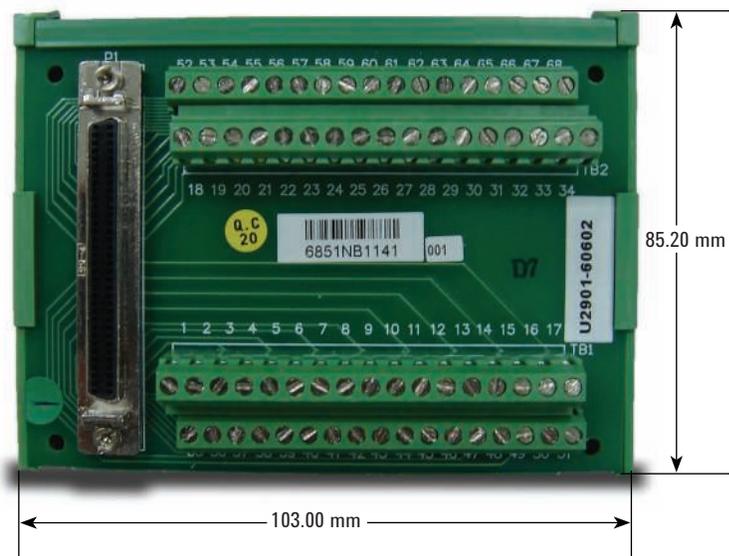

#### Side view



## Ordering information

Model	Description
U2351A	16-Channel 250kSa/s USB modular multifunction DAQ
U2352A	16-Channel 250kSa/s USB modular multifunction DAQ; without analog output
U2353A	16-Channel 500kSa/s USB modular multifunction DAQ
U2354A	16-Channel 500kSa/s USB modular multifunction DAQ; without analog output
U2355A	64-Channel 250kSa/s USB modular multifunction DAQ
U2356A	64-Channel 500kSa/s USB modular multifunction DAQ
U2331A	64-Channel 1MSa/s USB modular multifunction DAQ

## Optional accessories

Model	Description
U2802A	U2802A 31-Channel Thermocouple Input Device
U2901A	Terminal block and SCSI-II 68-pin connector with 1-meter cable
U2902A	Terminal block and SCSI-II 68-pin connector with 2-meter cable



**myAgilent**

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



[www.axistandard.org](http://www.axistandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



**Three-Year Warranty**

[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Agilent's combination of product reliability and three-year warranty coverage is another way we help you achieve your business goals: increased confidence in uptime, reduced cost of ownership and greater convenience.



**Agilent Advantage Services**

[www.agilent.com/find/AdvantageServices](http://www.agilent.com/find/AdvantageServices)

Accurate measurements throughout the life of your instruments.



[www.agilent.com/quality](http://www.agilent.com/quality)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: [www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

#### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700* *0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

*For other unlisted countries:*

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

(BP2-19-13)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012, 2013  
Published in USA, June 28, 2013  
5991-0566EN



**Agilent Technologies**